

ECS tuning fork type crystals are used as a clock source in communication equipment, measuring instruments, microprocessors and other time management applications. Their low power consumption makes these crystals ideal for portable equipment.

[Request a Sample](#)






- Cost Effective
- Tight Tolerance
- Long Term Stability
- Excellent Resistance and Environmental Characteristics
- Pb Free/RoHS Compliant


## OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS		3X8X	2X6X	1X5X	UNITS
Frequency	F <sub>0</sub>	32.768	32.768	32.768	KHz
Frequency Tolerance	Δf/fo	±20	±20	± 20	ppm
Load Capacitance	C <sub>L</sub>	12.5	12.5	8.0	pF
Drive Level (max)	D <sub>L</sub>	1	1	1	μW
Resistance At Series Resonance	R <sub>1</sub>	35(max)	35(max)	40(max)	KΩ
Q-Factor	Q	90,000(typ.)	70,000(typ.)	80,000(typ.)	
Turnover Temperature	T <sub>M</sub>	+25 ±5	+25 ±5	+25 ±5	°C
Temperature Coefficient	β	-0.040ppm/°C <sup>2</sup> max.	-0.040ppm/°C <sup>2</sup> max.	-0.040ppm/°C <sup>2</sup> max.	PPM/ΔC°
Shunt Capacitance	C <sub>0</sub>	1.60 (typ.)	1.35 (typ.)	1.00 (typ.)	pF
Capacitance Ratio		460 (typ.)	450 (typ.)	400 (typ.)	
Operating Temp	T <sub>opr</sub>	-10 ~ +60			°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +85			°C
Shock Resistance		Drop 3 times on hard wooden board from height of 75cm / ±5 ppm max.			PPM
Insulation Resistance	IR	500 MΩ min./DC100V			MΩ
Aging (First Year)	Δf/fo	±3 ppm max. @ +25°C ±3°C			ppm
Motional Capacitance	C <sub>1</sub>	0.0035(typ.)	0.0030(typ.)	0.0025(typ.)	pF

### DIMENSIONS (mm)

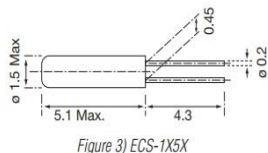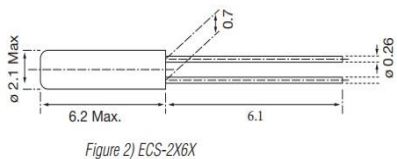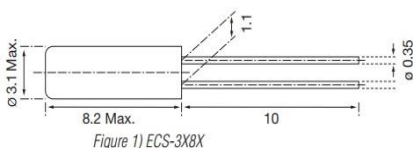

### RECOMMENDED OSCILLATION CIRCUIT




### ELECTRICAL CHARACTERISTICS

IC: TC 4069P  
 Rf: 10MΩ  
 Rd: 330KΩ (As required)  
 C<sub>1</sub> = 22pF, C<sub>2</sub> = 22pF  
 V<sub>DD</sub> = 3.0V

*In this circuit, low drive level with a maximum of 1μW is recommended. If excessive drive is applied, irregular oscillation or quartz element fractures may occur.*

### PARABOLIC TEMPERATURE CURVE

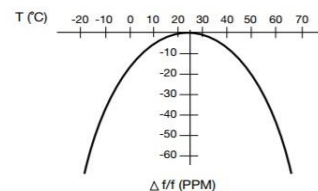

*To determine frequency stability, use parabolic curvature. For example: What is the stability at 45°C?*

- 1) Change in T (°C) = 45 - 25 = 20°C
- 2) Change in frequency = -0.04 PPM × (ΔT)<sup>2</sup> = -0.04 PPM × (20)<sup>2</sup> = -16.0 PPM

### PART NUMBERING GUIDE:

Manufacturer	Frequency	Load Capacitance	Package Type*
ECS	.327	12.5	8X
ECS	.327	12.5	13X
ECS	.327	12.5	14X

\* Package type examples (8X = 3x8, 13X = 2x6, 14X = 1x5)

SOLDER PROFILE
Peak solder Temp +260°C Max 10 sec Max.
2 Cycles Max.
MSL 1, Lead Finish Sn/Cu Matte

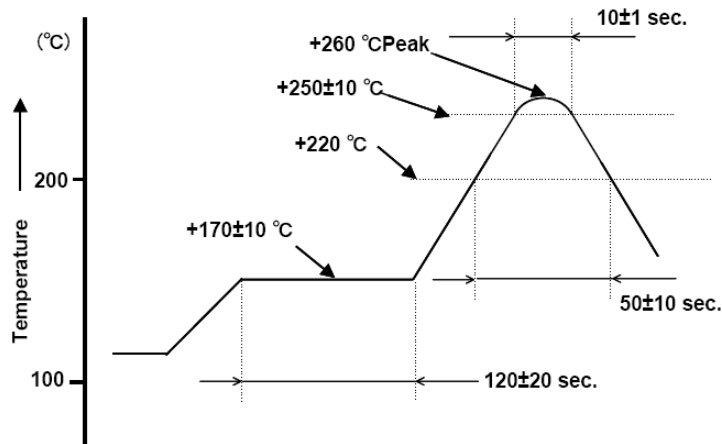


Figure 1) Suggested Solder Profile